

TRANSDUCER (TRM) SPECIFICATIONS




The transducer connects to the dolphicam2 Black Box through a standard USB C cable which handles power, control signals and data. The unique 128x128 “crossed electrodes” transducer creates a grid of 16,384 individual ultrasonic echoes (“A-scans”) over the 32x32mm transducer area, which makes it capable of detecting very small defects.

Each frequency TRM comes as standard with a delay line that has been chosen to match the acoustic properties of the transducer. These include Rexolite, Aqualene and Aqualink materials, and delay line thickness options of 8 and 12mm. For increased flexibility you can choose a TRM without a delay line as we offer a range of replaceable models.

TRM 1.5 MHz

The 1.5MHz transducer module (TRM) is currently our lowest frequency on offer and is designed for maximum penetration of thick GFRP and thick, out-of-autoclave CFRP with porosity. Applications include wind turbine blades, marine GFRP and thick section GFRP piping. Typical component thicknesses are around 1-60mm*.

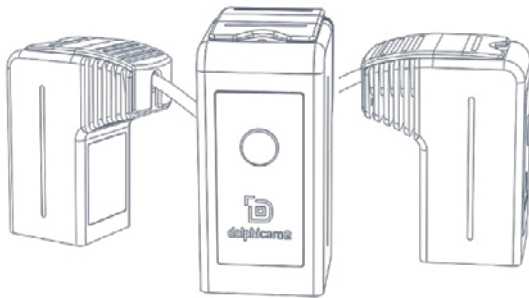

SIZE AND WEIGHT

Size and weight are excluding cable and delay line.

Width	40mm / 1.6 inch
Length	40mm / 1.6 inch
Height	84mm / 3.4 inch
Weight	265 grams


TECHNICAL DETAILS

Transducer Type Matrix	(2D-array)
Transducer Elements	64x64 (4,096)
Transducer Aperture	32 x 32 mm
Element Pitch	250 μ m
Center Frequency	1.5 MHz
-6dB Frequency Bandwidth	110%
Sample Rate	50 MHz
Acquisition Rate	
A-scans	100,000 – 500,000 datasets per second
3D	10-40 3D volumes per second

TRANSDUCER MODELS


TRM-EA-1.5MHz (no delay line)

TRM-EC-1.5MHz (12mm Aqualene 320)

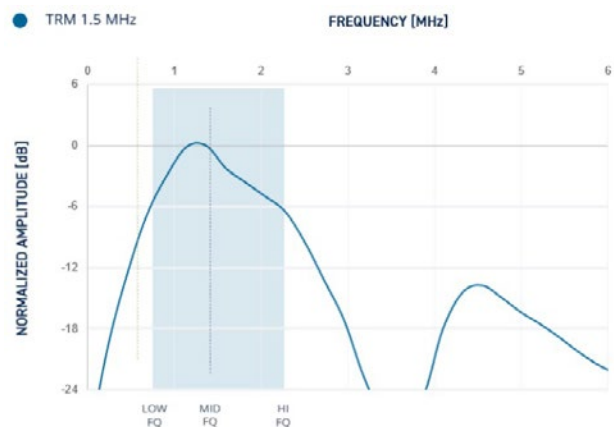

TRM 2.5 MHz

The 2.5MHz transducer module (TRM) is well-suited to thicker section and lower grade composite material inspection. These include GFRP, out-of-autoclave CFRP as well as thick, coarse-grained metals. Applications include wind turbine blades, marine GFRP and CFRP, GFRP piping and thermal power. Typical component thicknesses are around 1-50mm.

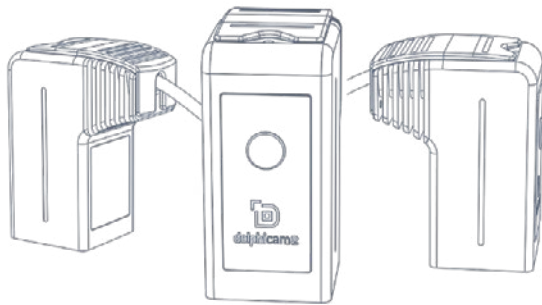

SIZE AND WEIGHT

Size and weight are excluding cable and delay line.


Width	40mm / 1.6 inch
Length	40mm / 1.6 inch
Height	84mm / 3.4 inch
Weight	265 grams

TECHNICAL DETAILS

Transducer Type Matrix	(2D-array)
Transducer Elements	128x128 (16,384)
Transducer Aperture	32 x 32 mm
Element Pitch	250 μ m
Center Frequency	2.5 MHz
-6dB Frequency Bandwidth	90%
Sample Rate	50 MHz
Acquisition Rate	
A-scans	100,000 – 500,000 datasets per second
3D	10-40 3D volumes per second


TRANSDUCER MODELS

- TRM-BE-2.5MHz (no delay line)
- TRM-BG-2.5MHz (8mm Aqualink 100)
- TRM-BF-2.5MHz (8 mm Aqualene 320)
- TRM-BH-2.5MHz (12 mm Aqualene 320)

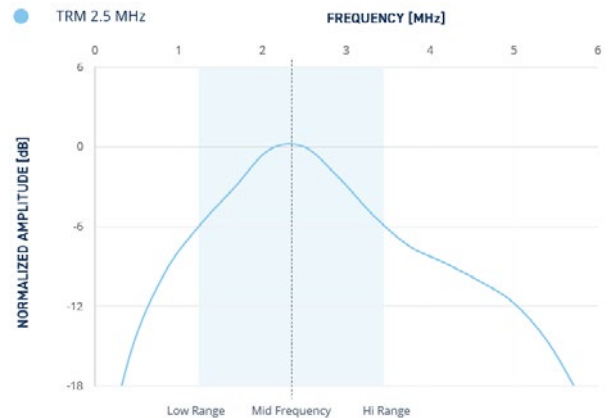

TRM 3.5 MHz

The 3.5MHz transducer module (TRM) is an excellent choice for CFRP applications, as the frequency is low enough to travel through CFRP but still high enough to get a great resolution on your inspection. This TRM is approved and recommended to be used within both the aerospace and automotive industries for CFRP inspection. It also works well for thicker metals, and for inspection of attenuative metals such as stainless steel and Inconel. Typical component thicknesses are around 1-40mm.

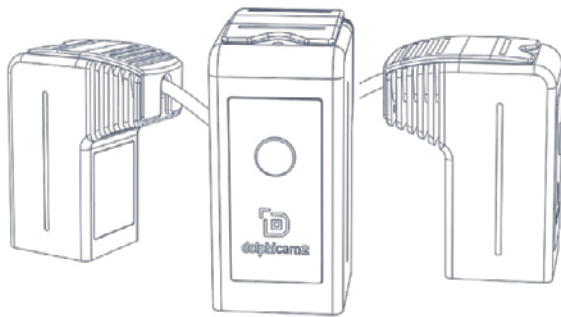

SIZE AND WEIGHT

Size and weight are excluding cable and delay line.


Width	40mm / 1.6 inch
Length	40mm / 1.6 inch
Height	84mm / 3.4 inch
Weight	265 grams

TECHNICAL DETAILS

Transducer Type Matrix	(2D-array)
Transducer Elements	128x128 (16,384)
Transducer Aperture	32 x 32 mm
Element Pitch	250 μ m
Center Frequency	3.5 MHz
-6dB Frequency Bandwidth	100%
Sample Rate	50 MHz
Acquisition Rate	
A-scans	100,000 – 500,000 datasets per second
3D	10-40 3D volumes per second


TRANSDUCER MODELS

- TRM-AE-3.5MHz (no delay line)
- TRM-AG-3.5MHz (8mm Aqualink 100)
- TRM-AF-3.5MHz (8 mm Aqualene 320)
- TRM-AH-3.5MHz (12mm Aqualene 320)
- TRM-AA-3.5MHz (8 mm Rexolite)

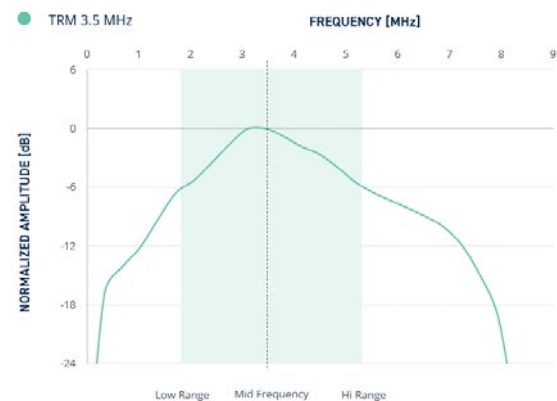

TRM 8 MHz

The 8MHz transducer module (TRM) is a great choice for a wide range of metallic applications. This frequency provides high resolution for great sensitivity, while also providing enough penetration for fine grained metal. It is also capable of inspection of high-grade composites, such as aerospace CFRP. Other applications include process piping, Typical component thickness range are around 1-20mm.

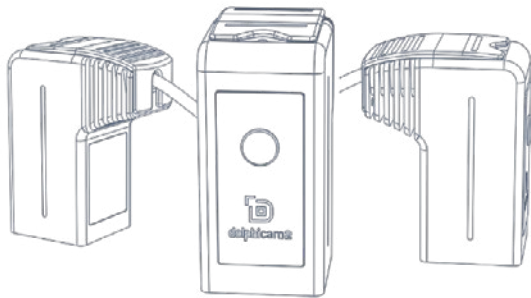

SIZE AND WEIGHT

Size and weight are excluding cable and delay line.


Width	40mm / 1.6 inch
Length	40mm / 1.6 inch
Height	84mm / 3.4 inch
Weight	265 grams

TECHNICAL DETAILS

Transducer Type Matrix	(2D-array)
Transducer Elements	64x64 (4,096)
Transducer Aperture	32 x 32 mm
Element Pitch	250 μ m
Center Frequency	8 MHz
-6dB Frequency Bandwidth	120%
Sample Rate	50 MHz
Acquisition Rate	
A-scans	100,000 – 500,000 datasets per second
3D	10-40 3D volumes per second


TRANSDUCER MODELS

TRM-DB-8MHz (8 mm Rexolite)

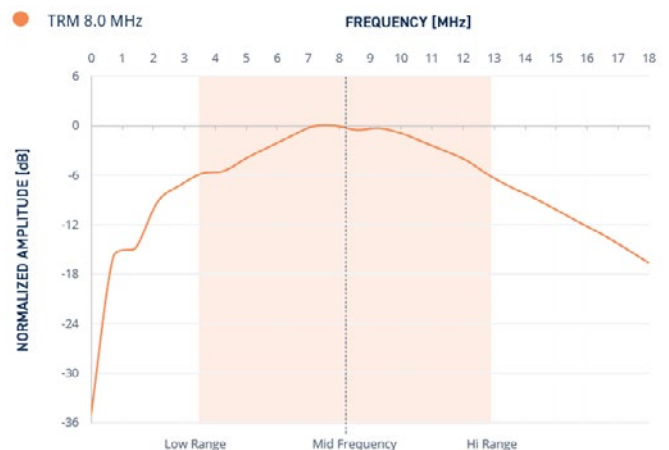

TRM 10 MHz

The 10MHz transducer module (TRM) is our highest frequency model and provides great sensitivity for inspections of thinner components. The short wavelengths generated by this TRM provide high spatial resolution through the depth of the component. Sheet metal, adhesive bonding layers, thin metallic vessels and pipes can all be inspected. Typical component thicknesses are around 1-15mm.

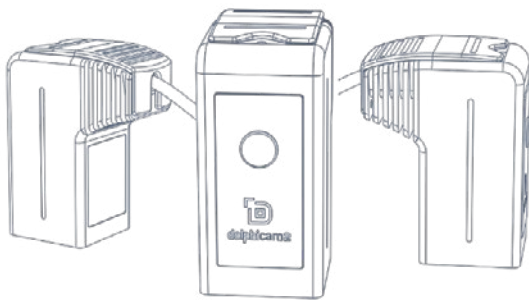

SIZE AND WEIGHT

Size and weight are excluding cable and delay line.


Width	40mm / 1.6 inch
Length	40mm / 1.6 inch
Height	84mm / 3.4 inch
Weight	265 grams


TECHNICAL DETAILS

Transducer Type Matrix	(2D-array)
Transducer Elements	64x64 (4,096)
Transducer Aperture	32 x 32 mm
Element Pitch	250 μ m
Center Frequency	10 MHz
-6dB Frequency Bandwidth	115%
Sample Rate	50 MHz
Acquisition Rate	
A-scans	100,000 – 500,000 datasets per second
3D	10-40 3D volumes per second


TRANSDUCER MODELS

TRM-DA-10MHz (8 mm Rexolite)

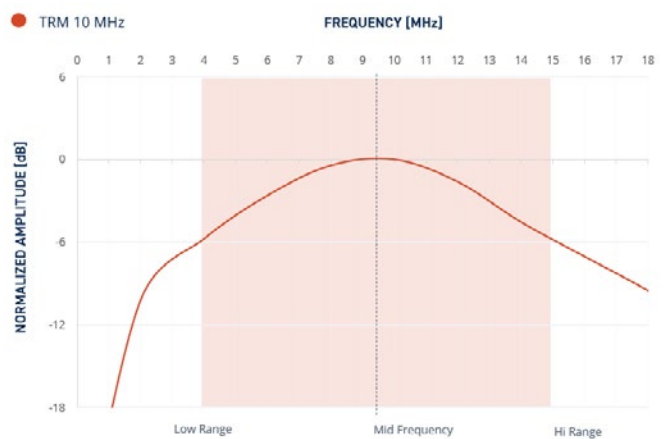



TRANSDUCERS (TRM)

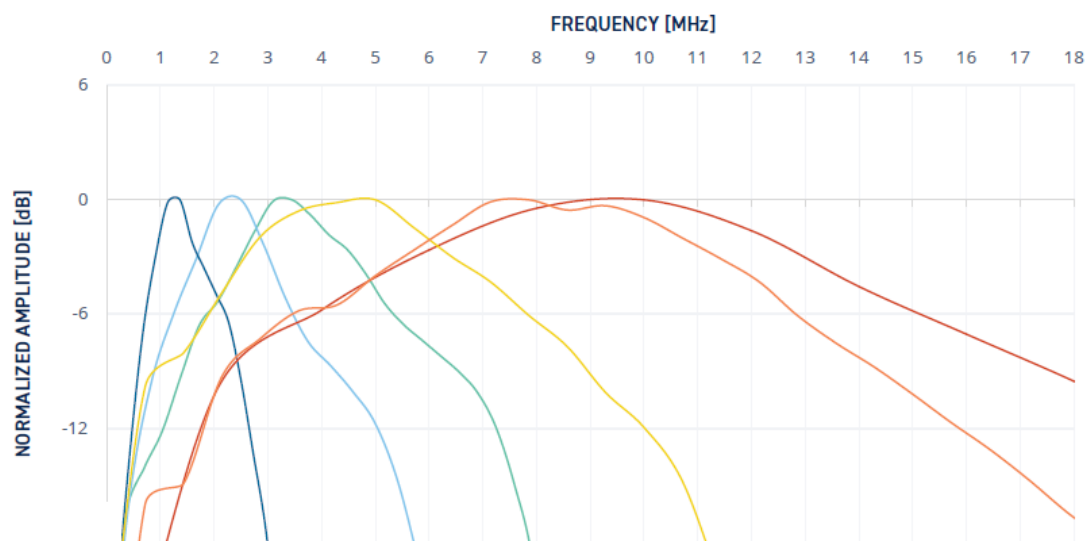

*Get in touch for specific material and penetration information as it can vary.

WANT TO LEARN MORE ABOUT WHAT YOU CAN DO WITH THE DOLPHICAM2

Contact us to arrange a 10-minute demonstration with one of our expert consultants to understand how you can utilize dolphicam2.

Everest Polska Sp. z o.o.

ul. Geodetów 176, 05-500 Piaseczno k. Warszawy
tel. (+48 22) 750 50 83, faks: (+48 22) 750 70 21
email: everestvit@everestvit.pl, www.everestvit.pl

www.everestvit.pl

EVPL-Dolphitec-TRM-Specifications-(04/2021)

Get in touch

technologia badań
wizualnych

Everest
Polska

Dolphitech AS
Studievegen 16
2815 Gjøvik
Norway



dolphitech.com
Sales@dolphitech.com

Made in Norway

© 2021 Dolphitech AS. All Rights Reserved. Privacy Policy